

# CHBE320 LECTURE VI DYNAMIC BEHAVIORS OF REPRESENTATIVE PROCESSES

Professor Dae Ryook Yang

Fall 2021


Dept. of Chemical and Biological Engineering  
Korea University

CHBE320 Process Dynamics and Control

Korea University 6-1

## Road Map of the Lecture VI

- **Dynamic Behavior of Representative Processes**
  - **Open-loop responses**
    - Step input
    - Impulse input
    - Sinusoidal input
    - Ramp input
  - **Bode diagram analysis**
  - **Effect of pole/zero location**

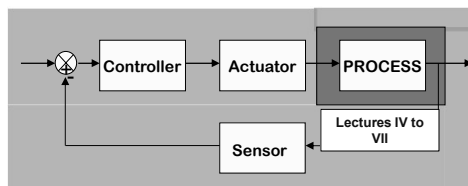


CHBE320 Process Dynamics and Control

Korea University 6-2

## REPRESENTATIVE TYPES OF RESPONSE

- For step inputs



Y(t)	Type of Model, G(s)
	Nonzero initial slope, no overshoot or nor oscillation, 1 <sup>st</sup> order model
	1 <sup>st</sup> order+Time delay
	Underdamped oscillation, 2 <sup>nd</sup> or higher order
	Overdamped oscillation, 2 <sup>nd</sup> or higher order
	Inverse response, negative (RHP) zeros
	Unstable, no oscillation, real RHP poles
	Unstable, oscillation, complex RHP poles
	Sustained oscillation, pure imaginary poles

CHBE320 Process Dynamics and Control

Korea University 6-3

## 1<sup>ST</sup> ORDER SYSTEM

- First-order linear ODE (assume all deviation variables)


$$\tau \frac{dy(t)}{dt} = -y(t) + Ku(t) \xrightarrow{\Omega} (\tau s + 1)Y(s) = KU(s)$$

- Transfer function:  $\frac{Y(s)}{U(s)} = \frac{K}{(\tau s + 1)} \rightarrow$  Gain  $\rightarrow$  Time constant

- Step response:

With  $U(s) = A/s$ ,

$$Y(s) = \frac{KA}{s(\tau s + 1)} \xrightarrow{\Omega^{-1}} y(t) = KA(1 - e^{-t/\tau})$$




- $y(\tau) = KA(1 - e^{-\tau/\tau}) \approx 0.632KA$
- $KA(1 - e^{-t/\tau}) \geq 0.99KA \Rightarrow t \approx 4.6\tau$  (Settling time= $4\tau \sim 5\tau$ )
- $y'(0) = KAe^{-t/\tau}/\tau \Big|_{t=0} = KA/\tau \neq 0$  (Nonzero initial slope)

CHBE320 Process Dynamics and Control

Korea University 6-4


• **Impulse response**

With  $U(s) = A$ ,  
 $Y(s) = \frac{KA}{(\tau s + 1)} \xrightarrow{\mathcal{L}^{-1}} y(t) = \frac{KA}{\tau} e^{-t/\tau}$



• **Ramp response**


With  $U(s) = a/s^2$ ,  
 $Y(s) = \frac{Ka}{s^2(\tau s + 1)} \xrightarrow{\mathcal{L}^{-1}} y(t) = Ka\tau e^{-t/\tau} + Ka(t - \tau)$



• **Sinusoidal response**

With  $U(s) = \mathcal{L}[A \sin \omega t] = A\omega / (s^2 + \omega^2)$ ,  
 $Y(s) = \frac{KA\omega}{(\tau s + 1)(s^2 + \omega^2)} \xrightarrow{\mathcal{L}^{-1}}$

$y(t) = \frac{KA}{\omega^2\tau^2 + 1} (\omega\tau e^{-t/\tau} - \omega\tau \cos \omega t + \sin \omega t)$



• **Ultimate sinusoidal response** ( $t \rightarrow \infty$ )

$$y_{\infty}(t) = \lim_{t \rightarrow \infty} \frac{KA}{\omega^2\tau^2 + 1} (\omega\tau e^{-t/\tau} - \omega\tau \cos \omega t + \sin \omega t)$$

$$= \frac{KA}{\omega^2\tau^2 + 1} (-\omega\tau \cos \omega t + \sin \omega t)$$

$$= \frac{KA}{\sqrt{\omega^2\tau^2 + 1}} \sin(\omega t + \varphi) \quad (\varphi = -\tan^{-1} \omega \tau)$$

Amplitude
Phase angle

- The output has the same period of oscillation as the input.
- But the amplitude is attenuated and the phase is shifted.

Normalized Amplitude Ratio  $(AR_N) = \frac{1}{\sqrt{\omega^2\tau^2 + 1}} < 1$       Phase angle  $= -\tan^{-1} \omega \tau$


- High frequency input will be attenuated more and phase is shifted more.

## BODE PLOT FOR 1<sup>ST</sup> ORDER SYSTEM

- **AR plot asymptote**

$$AR_N(\omega \rightarrow 0) = \lim_{\omega \rightarrow 0} \frac{1}{\sqrt{\omega^2 \tau^2 + 1}} = 1$$


$$AR_N(\omega \rightarrow \infty) = \lim_{\omega \rightarrow \infty} \frac{1}{\sqrt{\omega^2 \tau^2 + 1}} = \frac{1}{\omega \tau}$$



- **Phase plot asymptote**

$$\varphi(\omega \rightarrow 0) = -\lim_{\omega \rightarrow 0} \tan^{-1} \omega \tau = 0^\circ$$

$$\varphi(\omega \rightarrow \infty) = -\lim_{\omega \rightarrow \infty} \tan^{-1} \omega \tau = -90^\circ$$




- **It is also called “low-pass filter”**

## 1<sup>ST</sup> ORDER PROCESSES

- **Continuous Stirred Tank**

$$V \frac{dc_A}{dt} = qc_{Ai} - qc_A$$


$$\frac{C_A(s)}{C_{Ai}(s)} = \frac{q}{Vs + q} = \frac{1}{(V/q)s + 1}$$



- **With constant heat capacity and density**

$$\rho V C_p \frac{d(T - T_{ref})}{dt} = \rho q C_p (T_0 - T_{ref}) - \rho q C_p (T - T_{ref})$$

$$\frac{T(s)}{T_0(s)} = \frac{q}{Vs + q} = \frac{1}{(V/q)s + 1}$$



## INTEGRATING SYSTEM


- $$\frac{dy(t)}{dt} = Ku(t) \xrightarrow{\mathcal{L}} sY(s) = KU(s)$$

- Transfer Function:** 
$$\frac{Y(s)}{U(s)} = \frac{K}{s}$$

- Step Response**

With  $U(s) = 1/s$ ,

$$Y(s) = \frac{K}{s^2} \xrightarrow{\mathcal{L}^{-1}} y(t) = Kt$$



- The output is an integration of input.
- Impulse response is a step function.
- Non self-regulating system


## INTEGRATING PROCESSES

- Storage tank with constant outlet flow**

- Outlet flow is pumped out by a constant-speed, constant-volume pump
- Outlet flow is not a function of head.

$$A \frac{dh}{dt} = q_i - q$$

$$\frac{H(s)}{Q_i(s)} = \frac{1}{As} \quad \frac{H(s)}{Q(s)} = -\frac{1}{As}$$



## 2<sup>ND</sup> ORDER SYSTEM

- **2<sup>nd</sup> order linear ODE**

$$\tau^2 \frac{d^2 y(t)}{dt^2} + 2\zeta\tau \frac{dy(t)}{dt} + y(t) = Ku(t) \xrightarrow{\mathcal{L}} (\tau^2 s^2 + 2\zeta\tau s + 1)Y(s) = KU(s)$$

- **Transfer Function:**

$$\frac{Y(s)}{U(s)} = \frac{K}{(\tau^2 s^2 + 2\zeta\tau s + 1)}$$

$\xrightarrow{\text{Gain}}$   
 $\xrightarrow{\text{Time constant}}$   
 $\xrightarrow{\text{Damping Coefficient}}$

- **Step response**

- **Varies with the type of roots of denominator of the TF.**
  - **Real part of roots should be negative for stability:**  $\zeta \geq 0$
  - **Two distinct real roots ( $\zeta > 1$ ): overdamped (no oscillation)**
  - **Double root ( $\zeta = 1$ ): critically damped (no oscillation)**
  - **Complex roots ( $0 \leq \zeta < 1$ ): underdamped (oscillation)**

- **Case I ( $\zeta > 1$ ) with  $U(s)=1/s$**

$$Y(s) = \frac{K}{s(\tau^2 s^2 + 2\zeta\tau s + 1)} = \frac{K}{s(\tau_1 s + 1)(\tau_2 s + 1)} \xrightarrow{\mathcal{L}^{-1}} y(t) = K \left( 1 - \frac{\tau_1 e^{-t/\tau_1} - \tau_2 e^{-t/\tau_2}}{(\tau_1 - \tau_2)} \right)$$



- **Case II ( $\zeta = 1$ )**

$$Y(s) = \frac{K}{s(\tau^2 s^2 + 2\tau s + 1)} = \frac{K}{s(\tau s + 1)^2} \xrightarrow{\mathcal{L}^{-1}} y(t) = K [1 - (1 + t/\tau)e^{-t/\tau}]$$

- **Case III ( $0 \leq \zeta < 1$ )**

$$Y(s) = \frac{K}{s(\tau^2 s^2 + 2\zeta\tau s + 1)} \xrightarrow{\mathcal{L}^{-1}} y(t) = K \left[ 1 - e^{-\zeta t/\tau} \left\{ \cos \alpha t + \frac{\zeta}{\alpha\tau} \sin \alpha t \right\} \right] \quad \left( \alpha = \frac{\sqrt{1-\zeta^2}}{\tau} \right)$$

$\nearrow$  Natural frequency

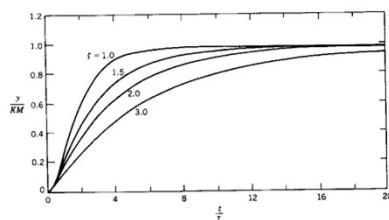

• **Ultimate sinusoidal response**

With  $U(s) = \mathcal{L}[A \sin \omega t]$ ,

$$Y(s) = \frac{KA\omega}{(\tau^2 s^2 + 2\zeta\tau s + 1)(s^2 + \omega^2)} \xrightarrow{\mathcal{L}^{-1}}$$

$$y(t) = \frac{KA}{\sqrt{(1 - \omega^2\tau^2)^2 + (2\zeta\omega\tau)^2}} \sin(\omega t + \varphi) \quad (\varphi = -\tan^{-1} \frac{2\zeta\omega\tau}{1 - \omega^2\tau^2})$$

– **Other method to find ultimate sinusoidal response**

For  $(s + \alpha + j\omega)$ ,  $y(t)$  has  $e^{-(\alpha+j\omega)t}$  and it becomes  $e^{-j\omega t}$  as  $t \rightarrow \infty$  ( $\alpha > 0$ ).

$$G(s) = \frac{K}{(\tau^2 s^2 + 2\zeta\tau s + 1)} \xrightarrow{s \rightarrow j\omega} G(j\omega) = \frac{K}{(1 - \tau^2\omega^2) + 2j\zeta\tau\omega}$$

$$AR = |G(j\omega)| = \left| \frac{K}{(1 - \tau^2\omega^2) + j\tau\omega} \right| = \frac{K}{\sqrt{(1 - \omega^2\tau^2)^2 + (2\zeta\omega\tau)^2}}$$

$$\varphi = \angle G(j\omega) = \tan^{-1} \frac{\text{Im}(G(j\omega))}{\text{Re}(G(j\omega))} = -\tan^{-1} \frac{2\zeta\omega\tau}{1 - \omega^2\tau^2}$$

**BODE PLOT FOR 2<sup>ND</sup> ORDER SYSTEM**

• **AR plot**  $AR_N(\omega \rightarrow \infty) = \lim_{\omega \rightarrow \infty} \frac{1}{\sqrt{(1 - \omega^2\tau^2)^2 + (2\zeta\omega\tau)^2}} = \frac{1}{(\omega\tau)^2}$

• **Phase plot**  $\varphi(\omega \rightarrow \infty) = -\lim_{\omega \rightarrow \infty} \tan^{-1} \frac{2\zeta\omega\tau}{1 - \omega^2\tau^2} = \lim_{\omega \rightarrow \infty} \tan^{-1} \frac{-2\zeta}{-\omega\tau} = -180^\circ$





• **Resonance**

$$d(AR_N)/d\omega = 0$$

$$\omega_{max} = \frac{\sqrt{1 - 2\zeta^2}}{\tau}$$

for  $0 < \zeta < 0.707$

The amplitude of output oscillation is bigger than that of input when the resonance occurs .



## 1ST ORDER VS. 2ND ORDER (OVERDAMPED)

- **Initial slope of step response**

$$\text{1st order: } y'(0) = \lim_{s \rightarrow \infty} \{s^2 Y(s)\} = \lim_{s \rightarrow \infty} \frac{KAs}{\tau s + 1} = \frac{KA}{\tau} \neq 0$$

$$\text{2nd order: } y'(0) = \lim_{s \rightarrow \infty} \{s^2 Y(s)\} = \lim_{s \rightarrow \infty} \frac{KAs}{\tau^2 s^2 + 2\zeta\tau s + 1} = 0$$

- **Shape of the curve (Convexity)**

1st order:  $y''(t) = -(KA/\tau^2)e^{-t/\tau} < 0$  (For  $K > 0$ )  $\Rightarrow$  No inflection

$$\text{2nd order: } y''(t) = -\frac{KA}{\tau_1 - \tau_2} \left( \frac{e^{-t/\tau_1}}{\tau_1} - \frac{e^{-t/\tau_2}}{\tau_2} \right)$$

(+  $\rightarrow$  - as  $t \uparrow$ )  $\Rightarrow$  Inflection

## CHARACTERIZATION OF SECOND ORDER SYSTEM

- **2<sup>nd</sup> order Underdamped response**

- Rise time ( $t_r$ )

$$t_r = \tau(n\pi - \cos^{-1}\zeta)/\sqrt{1-\zeta^2} \quad (n = 1)$$

- Time to 1<sup>st</sup> peak ( $t_p$ )

$$t_p = \tau\pi/\sqrt{1-\zeta^2}$$

- Settling time ( $t_s$ )

$$t_s \approx -\tau/\zeta \ln(0.05)$$


- Overshoot (OS)

$$OS = a/b = \exp(-\pi\zeta/\sqrt{1-\zeta^2})$$

- Decay ratio (DR): a function of damping coefficient only!

$$DR = c/a = (OS)^2 = \exp(-2\pi\zeta/\sqrt{1-\zeta^2})$$

- Period of oscillation ( $P$ )  $P = 2\pi\tau/\sqrt{1-\zeta^2}$

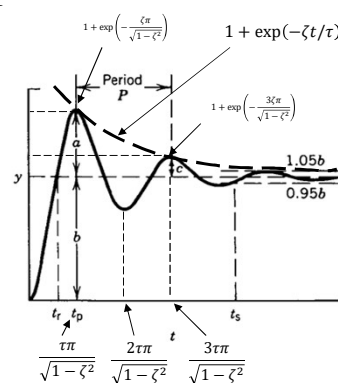




## 2<sup>ND</sup> ORDER PROCESSES

- **Two tanks in series**

- If  $v_1=v_2$ , critically damped.
- Or, overdamped (no oscillation)

$$\frac{C_A(s)}{C_{Ai}(s)} = \frac{1}{((V_1/q)s + 1)((V_2/q)s + 1)}$$



- **Spring-dashpot (shock absorber)**

- By force balance


$$(mg + f(t)) - ky - cv = ma$$

$$my'' = -ky - cy' + (mg + f(t))$$

$$\left(\frac{m}{k}\right)^2 y'' + 2\left(\frac{c}{4mk}\right)\frac{m}{k} y' + y = \tilde{f}(t)$$

$\tau$

$\zeta$  (can be <1: underdamped)

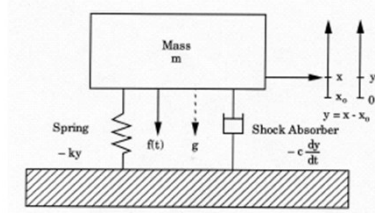

## Underdamped Processes

- Many examples can be found in mechanical and electrical system.
- Among chemical processes, open-loop underdamped process is quite rare.
- However, when the processes are controlled, the responses are usually underdamped.
- Depending on the controller tuning, the shape of response will be decided.
- Slight overshoot results short rise time and often more desirable.
- Excessive overshoot may result long-lasting oscillation.

## POLES AND ZEROS



$$G(s) = \frac{N(s)}{D(s)} = \frac{K(b_m s^m + b_{m-1} s^{m-1} + \dots + b_1 s + 1)}{(a_n s^n + a_{n-1} s^{n-1} + \dots + a_1 s + 1)}$$

- **Poles ( $D(s)=0$ )**
  - Where a transfer function cannot be defined.
  - Roots of the denominator of the transfer function
  - Modes of the response
  - Decide the stability
- **Zero ( $N(s)=0$ )**
  - Where a transfer function becomes zero.
  - Roots of the numerator of the transfer function
  - Decide weightings for each mode of response
  - Decide the size of overshoot or inverse response
- **They can be real or complex**

- **Real pole from  $(\tau s + 1)$**

$$s = -\frac{1}{\tau}$$

- **Mode:**  $e^{-t/\tau}$




- If the pole is at the origin, it becomes “integrating pole.”
- If the pole is in RHP, the response increases exponentially.

- **Complex pole from  $(\tau^2 s^2 + 2\zeta\tau s + 1)$  ( $-1 < \zeta < 1$ )**

$$s = -\frac{\zeta}{\tau} \pm j \frac{\sqrt{1-\zeta^2}}{\tau} = -\alpha \pm j\beta$$

$$|s| = \frac{\sqrt{\zeta^2 + 1 - \zeta^2}}{\tau} = \frac{1}{\tau} \quad (\text{function of } \tau \text{ only})$$

$$\angle s = \pm \tan^{-1} \frac{\sqrt{1-\zeta^2}}{\zeta} \quad (\text{function of } \zeta \text{ only})$$



– **Modes:**

$$e^{-\alpha \pm j\beta t} = e^{-\alpha t} (\cos \beta t \pm j \sin \beta t)$$

$$= e^{-\zeta t / \tau} \left( \cos \frac{\sqrt{1 - \zeta^2}}{\tau} t \pm j \sin \frac{\sqrt{1 - \zeta^2}}{\tau} t \right)$$

– Assume  $\tau$  is positive.

– If  $\zeta < 0$ , the exponential part will grow as  $t$  increases: **unstable**

– If  $\zeta > 0$ , the exponential part will shrink as  $t$  increases: **stable**

– If  $\zeta = 0$ , the roots are pure imaginary: **sustained oscillation**

• **Effect of zero**

$$G(s) = \frac{N(s)}{(s + p_1) \cdots (s + p_n)} = w_1 \frac{1}{(s + p_1)} + \cdots + w_n \frac{1}{(s + p_n)}$$

– The effects on weighting factors are not obvious, but it is clear that the numerator (zeros) will change the weighting factors.

## EFFECTS OF ZEROS

• **Lead-lag module**

$$G(s) = \frac{N(s)}{D(s)} = \frac{K(\tau_a s + 1)}{(\tau_1 s + 1)} \begin{matrix} \longrightarrow \text{Lead} \\ \longrightarrow \text{Lag} \end{matrix}$$

– Depending on the location of zero

$$Y(s) = \frac{KM(\tau_a s + 1)}{s(\tau_1 s + 1)} = KM \left\{ \frac{1}{s} + \frac{\tau_a - \tau_1}{\tau_1 s + 1} \right\} \quad y(t) = KM \left[ 1 - \left( 1 - \frac{\tau_a}{\tau_1} \right) e^{-t/\tau_1} \right]$$

(a)  $\tau_a > \tau_1 > 0$


**The lead dominates the lag.**

(b)  $0 \leq \tau_a < \tau_1$

**The lag dominates the lead.**

(c)  $0 > \tau_a$

**Inverse response**

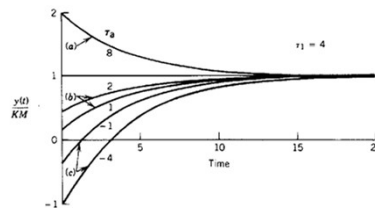

• **Overdamped 2<sup>nd</sup> order+single zero system**

$$G(s) = \frac{N(s)}{D(s)} = \frac{K(\tau_a s + 1)}{(\tau_1 s + 1)(\tau_2 s + 1)}$$

$$Y(s) = \frac{KM(\tau_a s + 1)}{s(\tau_1 s + 1)(\tau_2 s + 1)} = KM \left\{ \frac{1}{s} + \frac{\tau_1(\tau_a - \tau_1)}{\tau_1 - \tau_2} \frac{1}{\tau_1 s + 1} + \frac{\tau_2(\tau_a - \tau_2)}{\tau_2 - \tau_1} \frac{1}{\tau_2 s + 1} \right\}$$

$$y(t) = KM \left[ 1 + \frac{\tau_a - \tau_1}{\tau_1 - \tau_2} e^{-t/\tau_1} + \frac{\tau_a - \tau_2}{\tau_2 - \tau_1} e^{-t/\tau_2} \right]$$

(a)  $\tau_a > \tau_1 > 0$  (assume  $\tau_1 > \tau_2$ )


**The lead dominates the lags.**

(b)  $0 < \tau_a \leq \tau_1$

**The lags dominate the lead.**

(c)  $0 > \tau_a$

**Inverse response**




• **Other interpretation**


$$G(s) = \frac{K(\tau_a s + 1)}{(\tau_1 s + 1)(\tau_2 s + 1)} = \frac{K_1}{(\tau_1 s + 1)} + \frac{K_2}{(\tau_2 s + 1)}$$

$$K_1 = \frac{K(\tau_a s + 1)}{(\tau_2 s + 1)} \Big|_{s=-1/\tau_1} = \frac{K(\tau_1 - \tau_a)}{(\tau_1 - \tau_2)}$$


$$K_2 = \frac{K(\tau_a s + 1)}{(\tau_1 s + 1)} \Big|_{s=-1/\tau_2} = \frac{K(\tau_a - \tau_2)}{(\tau_1 - \tau_2)}$$



– Since  $\tau_1 > \tau_2$ , **1 is slow dynamics and 2 is fast dynamics.**

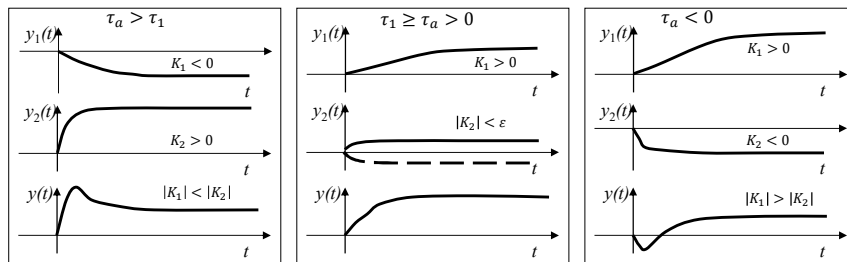


## EFFECTS OF POLE LOCATION

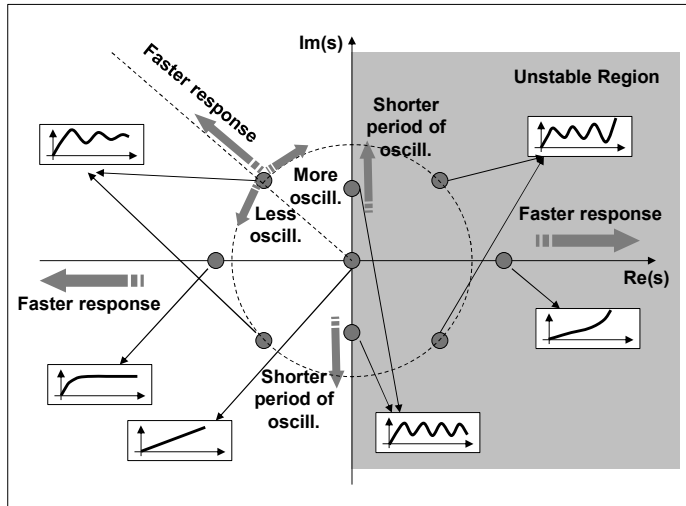

CHBE320 Process Dynamics and Control

Korea University 6-25

## EFFECTS OF ZERO LOCATION

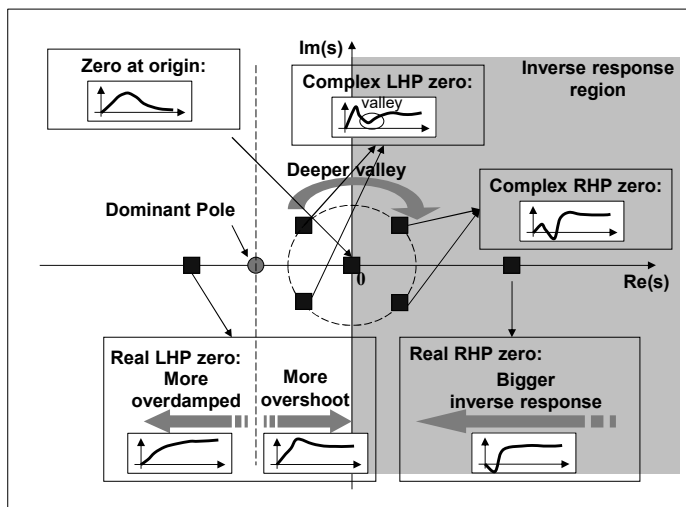

CHBE320 Process Dynamics and Control

Korea University 6-26