

# CHE302 LECTURE IV MATHEMATICAL MODELING OF CHEMICAL PROCESS

Professor Dae Ryook Yang


Fall 2001

Dept. of Chemical and Biological Engineering  
Korea University

## DYNAMIC VERSUS STEADY-STATE MODEL

### • Dynamic model

- Describes time behavior of a process
  - Changes in input, disturbance, parameters, initial condition, etc.
- Described by a set of differential equations  
: ordinary (ODE), partial (PDE), differential-algebraic(DAE)



### • Steady-state model

- Steady state: No further changes in all variables
- No dependency in time: No transient behavior
- Can be obtained by setting the time derivative term zero

## THE RATIONALE FOR MATHEMATICAL MODELING

### • Where to use

- To improve understanding of the process
- To train plant operating personnel
- To design the control strategy for a new process
- To select the controller setting
- To design the control law
- To optimize process operating conditions

### • A Classification of Models

- Theoretical models (based on physicochemical law)
- Empirical models (based on process data analysis)
- Semi-empirical models (combined approach)

## MODELING PRINCIPLES

### • Conservation law

- Within a defined system boundary (control volume)

$$\left[ \begin{array}{c} \text{rate of} \\ \text{accumulation} \end{array} \right] = \left[ \begin{array}{c} \text{rate of} \\ \text{input} \end{array} \right] - \left[ \begin{array}{c} \text{rate of} \\ \text{output} \end{array} \right] + \left[ \begin{array}{c} \text{rate of} \\ \text{generation} \end{array} \right] - \left[ \begin{array}{c} \text{rate of} \\ \text{disappearance} \end{array} \right]$$

- Mass balance (overall, components)
- Energy balance
- Momentum or force balance
- Algebraic equations: relationships between variables and parameters

## MODELING APPROACHES

- **Theoretical Model**
  - Follow conservation laws
  - Based on physicochemical laws
  - Variables and parameters have physical meaning
  - Difficult to develop
  - Can become quite complex
  - Extrapolation is valid unless the physicochemical laws are invalid
  - Used for optimization and rigorous prediction of the process behavior
- **Empirical model**
  - Based on the operation data
  - Parameters may not have physical meaning
  - Easy to develop
  - Usually quite simple
  - Requires well designed experimental data
  - The behavior is correct only around the experimental condition
  - Extrapolation is usually invalid
  - Used for control design and simplified prediction model

## LINEAR VERSUS NONLINEAR MODELS

- **Superposition principle**

$\forall \mathbf{a}, \mathbf{b} \in \mathfrak{R}$ , and for a linear operator,  $L$

Then  $L(\mathbf{a} x_1(t) + \mathbf{b} x_2(t)) = \mathbf{a} L(x_1(t)) + \mathbf{b} L(x_2(t))$
- **Linear dynamic model: superposition principle holds**

$\forall \mathbf{a}, \mathbf{b} \in \mathfrak{R}$ ,  $u_1(t) \rightarrow y_1(t)$  and  $u_2(t) \rightarrow y_2(t)$

$\mathbf{a} u_1(t) + \mathbf{b} u_2(t) \rightarrow \mathbf{a} y_1(t) + \mathbf{b} y_2(t)$

$\forall \mathbf{a}, \mathbf{b} \in \mathfrak{R}$ ,  $x_1(0) \rightarrow y_1(t)$  and  $x_2(0) \rightarrow y_2(t)$


$\mathbf{a} x_1(0) + \mathbf{b} x_2(0) \rightarrow \mathbf{a} y_1(t) + \mathbf{b} y_2(t)$

  - Easy to solve and analytical solution exists.
  - Usually, locally valid around the operating condition
- **Nonlinear: “Not linear”**
  - Usually, hard to solve and analytical solution does not exist.

## DEGREE OF FREEDOM (DOF) ANALYSIS

- **DOF**
  - Number of variables that can be specified independently
  - $N_F = N_V - N_E$ 
    - $N_F$ : Degree of freedom (no. of independent variables)
    - $N_V$ : Number of variables
    - $N_E$ : Number of equations (no. of dependent variables)
    - Assume no equation can be obtained by a combination of other equations
- **Solution depending on DOF**
  - If  $N_F = 0$ , the system is *exactly determined*. Unique solution exists.
  - If  $N_F > 0$ , the system is *underdetermined*. Infinitely many solutions exist.
  - If  $N_F < 0$ , the system is *overdetermined*. No solutions exist.

## ILLUSTRATION OF SUPERPOSITION PRINCIPLE

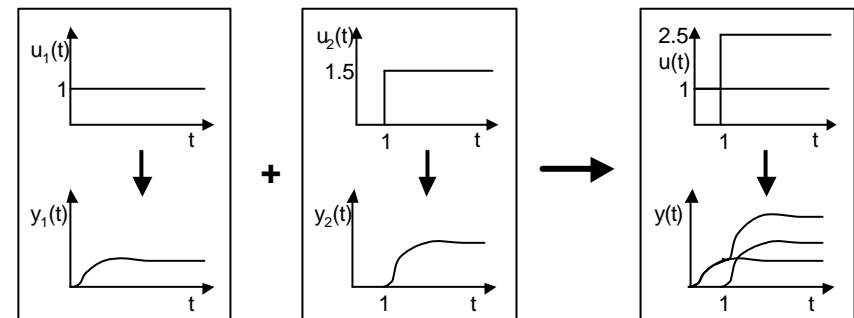

- **Valid only for linear process**
  - For example, if  $y(t) = u(t)^2$ ,  $(u_1(t) + 1.5u_2(t))^2$  is not same as  $u_1(t)^2 + 1.5u_2(t)^2$ .

## TYPICAL LINEAR DYNAMIC MODEL

### Linear ODE

$$t \frac{dy(t)}{dt} = -y(t) + Ku(t) \quad (t \text{ and } K \text{ are constant, 1st order})$$

$$\begin{aligned} \frac{d^n y(t)}{dt^n} + a_{n-1} \frac{d^{n-1} y(t)}{dt^{n-1}} + \dots + a_0 y(t) \\ = b_m \frac{d^m u(t)}{dt^m} + b_{m-1} \frac{d^{m-1} u(t)}{dt^{m-1}} + \dots + b_0 u(t) \quad (\text{nth order}) \end{aligned}$$


### Nonlinear ODE

$$t \frac{dy(t)}{dt} = -y(t)^2 + Ku(t) \quad t \frac{dy(t)}{dt} y(t) = -y(t) \sin(y) + Ku(t)$$

$$t \frac{dy(t)}{dt} = -y(t) + K\sqrt{u(t)} \quad t \frac{dy(t)}{dt} = -e^{-y(t)} + Ku(t)$$

### Continuous Stirred Tank Reactor (CSTR)

- Liquid level is constant (No acc. in tank)
- Constant density, perfect mixing
- Reaction:  $A \rightarrow B$  ( $r = k_0 \exp(-E/RT) c_A$ )
- System boundary: CSTR tank
- Component mass balance



$$V \frac{dc_A}{dt} = q(c_{A_i} - c_A) - Vkc_A$$

- Energy balance

$$V r C_p \frac{dT}{dt} = q r C_p (T_i - T) + (-\Delta H) V k c_A + UA(T_c - T)$$


- DOF analysis

- No. of variables: 6 ( $q, c_A, c_{A_i}, T, T_c$ )
- No. of equation: 2 (two dependent vars.:  $c_A, T$ )
- DOF = 6 - 2 = 4
- Independent variables: 4 ( $q, c_{A_i}, T_i, T_c$ )
- Parameters: kinetic parameters,  $V, U, A$ , other physical properties
- Disturbances: any of  $q, c_{A_i}, T_i, T_c$ , which are not manipulatable

## MODELS OF REPRESENTATIVE PROCESSES

### Liquid storage systems


- System boundary: storage tank
- Mass in:  $q_i$  (vol. flow, indep. var)
- Mass out:  $q$  (vol. flow, dep. var)
- No generation or disappearance (no reaction or leakage)
- No energy balance



- DOF = 2 ( $h, q_i$ ) - 1 = 1

- If  $f(h) = h/R_v$ , the ODE is linear. ( $R_v$  is the resistance to flow)

- If  $f(h) = C_v \sqrt{rgh/g_c}$ , the ODE is nonlinear. ( $C_v$  is the valve constant)

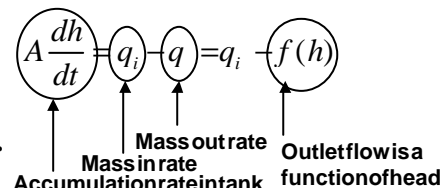

## STANDARD FORM OF MODELS

From the previous example

$$\frac{dc_A}{dt} = \frac{q}{V} (c_{A_i} - c_A) - kc_A = f_1(c_A, T, q, c_{A_i})$$

$$\frac{dT}{dt} = \frac{q}{V} (T_i - T) + \frac{q}{rC_p} (-\Delta H) kc_A + \frac{UA}{rC_p} (T_c - T) = f_2(c_A, T, q, T_c, T_i)$$

### State-space model

$$\dot{\mathbf{x}} = d\mathbf{x}/dt = \mathbf{f}(\mathbf{x}, \mathbf{u}, \mathbf{d})$$

$$\text{where } \mathbf{x} = [x_1, \dots, x_n]^T, \mathbf{u} = [u_1, \dots, u_m]^T, \mathbf{d} = [d_1, \dots, d_l]^T$$

- $\mathbf{x}$ : states,  $[c_A, T]^T$
- $\mathbf{u}$ : inputs,  $[q, T_c]^T$
- $\mathbf{d}$ : disturbances,  $[c_{A_i}, T_i]^T$
- $\mathbf{y}$ : outputs - can be a function of above,  $\mathbf{y} = \mathbf{g}(\mathbf{x}, \mathbf{d}, \mathbf{u})$ ,  $[c_A, T]^T$
- If higher order derivatives exist, convert them to 1<sup>st</sup> order.

## CONVERT TO 1<sup>ST</sup>-ORDER ODE

- Higher order ODE

$$\frac{d^n x(t)}{dt^n} + a_{n-1} \frac{d^{n-1} x(t)}{dt^{n-1}} + \dots + a_0 x(t) = b_0 u(t)$$

- Define new states

$$x_1 = x, x_2 = \dot{x}, x_3 = \ddot{x}, \dots, x_n = x^{(n-1)}$$

- A set of 1<sup>st</sup>-order ODE's

$$\dot{x}_1 = x_2$$

$$\dot{x}_2 = x_3$$

$$\vdots$$

$$\dot{x}_n = -a_{n-1} x_n - a_{n-2} x_{n-1} - \dots - a_0 x_1 + b_0 u$$

## LINEARIZATION

- Equilibrium (Steady state)

- Set the derivatives as zero:  $0 = f(\bar{x}, \bar{u}, \bar{d})$

- Overbar denotes the steady-state value and  $(\bar{x}, \bar{u}, \bar{d})$  is the equilibrium point. (could be multiple)

- Solve them analytically or numerically using Newton method

- Linearization around equilibrium point

- Taylor series expansion to 1<sup>st</sup> order

$$f(\mathbf{x}, \mathbf{u}) = f(\bar{\mathbf{x}}, \bar{\mathbf{u}}) + \frac{\partial f}{\partial \mathbf{x}} \bigg|_{(\bar{\mathbf{x}}, \bar{\mathbf{u}})} (\mathbf{x} - \bar{\mathbf{x}}) + \frac{\partial f}{\partial \mathbf{u}} \bigg|_{(\bar{\mathbf{x}}, \bar{\mathbf{u}})} (\mathbf{u} - \bar{\mathbf{u}}) + \dots$$

- Ignore higher order terms

- Define deviation variables:  $\mathbf{x}' = \mathbf{x} - \bar{\mathbf{x}}, \mathbf{u}' = \mathbf{u} - \bar{\mathbf{u}}$

$$\dot{\mathbf{x}}' = \frac{\partial f}{\partial \mathbf{x}} \bigg|_{(\bar{\mathbf{x}}, \bar{\mathbf{u}})} \mathbf{x}' + \frac{\partial f}{\partial \mathbf{u}} \bigg|_{(\bar{\mathbf{x}}, \bar{\mathbf{u}})} \mathbf{u}' = \mathbf{A} \mathbf{x}' + \mathbf{B} \mathbf{u}'$$

Jacobian		
$\frac{\partial f}{\partial x_1}$	...	$\frac{\partial f}{\partial x_n}$
$\vdots$	$\ddots$	$\vdots$
$\frac{\partial f}{\partial u_1}$	...	$\frac{\partial f}{\partial u_n}$

## SOLUTION OF MODELS

- ODE (state-space model)

- Linear case: find the analytical solution via Laplace transform, or other methods.

- Nonlinear case: analytical solution usually does not exist.

- Use a numerical integration, such as RK method, by defining initial condition, time behavior of input/disturbance
- Linearize around the operating condition and find the analytical solution

- PDE

- Convert to ODE by discretization of spatial variables using finite difference approximation and etc.

$$\frac{\partial T_L}{\partial t} = -v \frac{\partial T_L}{\partial z} + \frac{1}{\tau_{HL}} (T_w - T_L) \quad \longrightarrow \quad \frac{dT_L(j)}{dt} = -\frac{v}{\Delta z} T_L(j-1) - \left( \frac{v}{\Delta z} + \frac{1}{\tau_{HL}} \right) T_L(j) + \frac{1}{\tau_{HL}} T_w$$

$$\frac{\partial T_L}{\partial z} \approx \frac{T_L(j) - T_L(j-1)}{\Delta z} \quad (j = 1, \dots, N)$$