

CHE302 LECTURE VI DYNAMIC BEHAVIORS OF REPRESENTATIVE PROCESSES

Professor Dae Ryook Yang

Fall 2001

Dept. of Chemical and Biological Engineering
Korea University

1ST ORDER SYSTEM

- **First-order linear ODE** (assume all deviation variables)

$$t \frac{dy(t)}{dt} = -y(t) + Ku(t) \xrightarrow{L} (ts + 1)Y(s) = KU(s)$$


- **Transferfunction:** $\frac{Y(s)}{U(s)} = \frac{K}{(ts + 1)}$
 - Gain
 - Time constant

- **Stepresponse:**

With $U(s) = A/s$,


$$Y(s) = \frac{KA}{s(ts + 1)} \xrightarrow{L} y(t) = KA(1 - e^{-t/t})$$

- $y(t) = KA(1 - e^{-t/t}) \approx 0.632KA$
- $KA(1 - e^{-t/t}) \geq 0.99KA \Rightarrow t \approx 4.6t$ (Settling time = $4t \sim 5t$)
- $y'(0) = KAe^{-t/t} / t \Big|_{t=0} = KA/t \neq 0$ (Nonzero initial slope)



REPRESENTATIVE TYPES OF RESPONSE

- For step inputs




Y(t)	Type of Model, G(s)
	Nonzero initial slope, no overshoot or no oscillation, 1 st order model
	1 st order + Time delay
	Underdamped oscillation, 2 nd or higher order
	Overdamped oscillation, 2 nd or higher order
	Inverse response, negative (RHP) zeros
	Unstable, no oscillation, real RHP poles
	Unstable, oscillation, complex RHP poles
	Sustained oscillation, pure imaginary poles

- **Impulseresponse**

With $U(s) = A$,


$$Y(s) = \frac{KA}{(ts + 1)} \xrightarrow{L} y(t) = \frac{KA}{t} e^{-t/t}$$



- **Rampresponse**

With $U(s) = a/s^2$,

$$Y(s) = \frac{Ka}{s^2(ts + 1)} \xrightarrow{L} y(t) = Kate^{-t/t} + Ka(t - t)$$




- **Sinusoidal response**

With $U(s) = L[A \sin wt] = w/(s^2 + w^2)$,

$$Y(s) = \frac{KAw}{(ts + 1)(s^2 + w^2)} \xrightarrow{L}$$

$$y(t) = \frac{KA}{w^2 t^2 + 1} (wt e^{-t/t} - wt \cos wt + \sin wt)$$



• **Ultimate sinusoidal response** ($t \rightarrow \infty$)

$$y_{\infty}(t) = \lim_{t \rightarrow \infty} \frac{KA}{w^2 t^2 + 1} (wt e^{-t/t} - wt \cos wt + \sin wt)$$

$$= \frac{KA}{w^2 t^2 + 1} (-wt \cos wt + \sin wt)$$

$$= \underbrace{\left(\frac{KA}{\sqrt{w^2 t^2 + 1}} \right)}_{\text{Amplitude}} \sin(wt + \underbrace{f}_{\text{Phase angle}}) \quad (f = -\tan^{-1} wt)$$

- The output has the same period of oscillation as the input.
- But the amplitude is attenuated and the phase is shifted.

$$\text{Normalized Amplitude Ratio (AR}_N) = \frac{1}{\sqrt{w^2 t^2 + 1}} < 1 \quad \text{Phase angle} = -\tan^{-1} wt$$


- High frequency input will be attenuated more and phase is shifted more.

1ST ORDER PROCESSES

• **Continuous Stirred Tank**

$$V \frac{dc_A}{dt} = qc_{Ai} - qc_A$$


$$\frac{C_A(s)}{C_{Ai}(s)} = \frac{q}{Vs + q} = \frac{1}{(V/q)s + 1}$$



- With constant heat capacity and density

$$rVC_p \frac{d(T - T_{ref})}{dt} = rqc_p(T_0 - T_{ref}) - rqc_p(T - T_{ref})$$

$$\frac{T(s)}{T_0(s)} = \frac{q}{Vs + q} = \frac{1}{(V/q)s + 1}$$




BODE PLOT FOR 1ST ORDER SYSTEM

• **AR plot asymptote**

$$AR_N(w \rightarrow 0) = \lim_{w \rightarrow 0} \frac{1}{\sqrt{w^2 t^2 + 1}} = 1$$


$$AR_N(w \rightarrow \infty) = \lim_{w \rightarrow \infty} \frac{1}{\sqrt{w^2 t^2 + 1}} = \frac{1}{wt}$$



• **Phase plot asymptote**

$$f(w \rightarrow 0) = -\lim_{w \rightarrow 0} \tan^{-1} wt = 0^\circ$$

$$f(w \rightarrow \infty) = -\lim_{w \rightarrow \infty} \tan^{-1} wt = -90^\circ$$



- It is also called “low-pass filter”

INTEGRATING SYSTEM


$$\frac{dy(t)}{dt} = Ku(t) \xrightarrow{L} sY(s) = KU(s)$$

• **Transfer Function:** $\frac{Y(s)}{U(s)} = \frac{K}{s}$

• **Step Response**

With $U(s) = 1/s$,

$$Y(s) = \frac{K}{s^2} \xrightarrow{L} y(t) = Kt$$



- The output is an integration of input.
- Impulse response is a step function.
- Non self-regulating system


INTEGRATING PROCESSES

- Storage tank with constant outlet flow**

- Outlet flow is pumped out by a constant-speed, constant-volume pump
- Outlet flow is not a function of head.

$$A \frac{dh}{dt} = q_i - q$$

$$\frac{H(s)}{Q_i(s)} = \frac{1}{As} \quad \frac{H(s)}{Q(s)} = -\frac{1}{As}$$



- **Case I ($z > 1$) with $U(s)=1/s$**

$$Y(s) = \frac{K}{s(t^2s^2 + 2zts + 1)} = \frac{K}{s(t_1s + 1)(t_2s + 1)} \xrightarrow{L} y(t) = K \left(1 - \frac{t_1 e^{-t/t_1} - t_2 e^{-t/t_2}}{(t_1 - t_2)} \right)$$



- **Case II ($z = 1$)**

$$Y(s) = \frac{K}{s(t^2s^2 + 2ts + 1)} = \frac{K}{s(t_1s + 1)^2} \xrightarrow{L} y(t) = K \left[1 - (1 + t/t_1) e^{-t/t_1} \right]$$

- **Case III ($0 \leq z < 1$)**

$$Y(s) = \frac{K}{s(t^2s^2 + 2zts + 1)} \xrightarrow{L} y(t) = K \left[1 - e^{-z t/t_1} \left\{ \cos at + \frac{z}{at} \sin at \right\} \right] \quad \left(a = \frac{\sqrt{1-z^2}}{t_1} \right)$$

Natural frequency

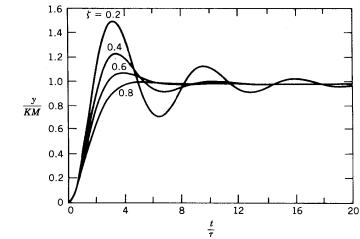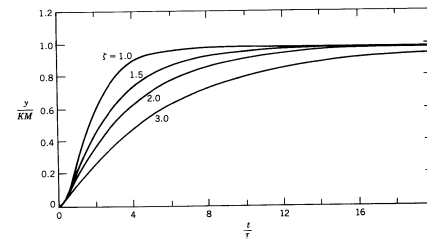

2ND ORDER SYSTEM

- **2nd order linear ODE**

$$t^2 \frac{d^2y(t)}{dt^2} + 2zt \frac{dy(t)}{dt} + y(t) = Ku(t) \xrightarrow{L} (t^2s^2 + 2zts + 1)Y(s) = KU(s)$$

- **Transfer Function:**

$$\frac{Y(s)}{U(s)} = \frac{K}{(t^2s^2 + 2zts + 1)}$$

→ Gain
→ Time constant
→ Damping Coefficient

- **Stepresponse**

- Varies with the type of roots of denominator of the TF.
 - Real part of roots should be negative for stability: $z \geq 0$
 - Two distinct real roots ($z > 1$): overdamped (no oscillation)
 - Double root ($z = 1$): critically damped (no oscillation)
 - Complex roots ($0 \leq z < 1$): underdamped (oscillation)

- **Ultimate sinusoidal response**

With $U(s) = L[A \sin \omega t]$,

$$Y(s) = \frac{KA\omega}{(t^2s^2 + 2zts + 1)(s^2 + \omega^2)} \xrightarrow{L}$$

$$y(t) = \frac{KA}{\sqrt{(1 - \omega^2 t^2)^2 + (2z\omega t)^2}} \sin(\omega t + f) \quad (f = -\tan^{-1} \frac{2z\omega t}{1 - \omega^2 t^2})$$

- **Other method to find ultimate sinusoidal response**

For $(s + a + j\omega)$, $y(t)$ has $e^{-(a+j\omega)t}$ and it becomes $e^{-j\omega t}$ as $t \rightarrow \infty$ ($a > 0$).

$$G(s) = \frac{K}{(t^2s^2 + 2zts + 1)} \xrightarrow{s \rightarrow j\omega} G(j\omega) = \frac{K}{(1 - t^2\omega^2) + 2jz\omega t}$$

$$AR = |G(j\omega)| = \left| \frac{K}{(1 - t^2\omega^2) + 2jz\omega t} \right| = \frac{K}{\sqrt{(1 - \omega^2 t^2)^2 + (2z\omega t)^2}}$$

$$f = \angle G(j\omega) = \tan^{-1} \frac{\text{Im}(G(j\omega))}{\text{Re}(G(j\omega))} = -\tan^{-1} \frac{2z\omega t}{1 - \omega^2 t^2}$$

BODE PLOT FOR 2ND ORDER SYSTEM

- **AR plot** $AR_N(\omega \rightarrow \infty) = \lim_{\omega \rightarrow \infty} \frac{1}{\sqrt{(1-\omega^2 t^2)^2 + (2z\omega t)^2}} = \frac{1}{(\omega t)^2}$
- **Phase plot** $f(\omega \rightarrow \infty) = -\lim_{\omega \rightarrow \infty} \tan^{-1} \frac{2z\omega t}{1-\omega^2 t^2} = \lim_{\omega \rightarrow \infty} \tan^{-1} \frac{-2z}{-\omega t} = -180^\circ$


Resonance

$$d(AR_N)/d\omega = 0$$

$$\omega_{\max} = \frac{\sqrt{1-2z^2}}{t}$$

for $0 < z < 0.707$


The amplitude of output oscillation is bigger than that of input when the resonance occurs .

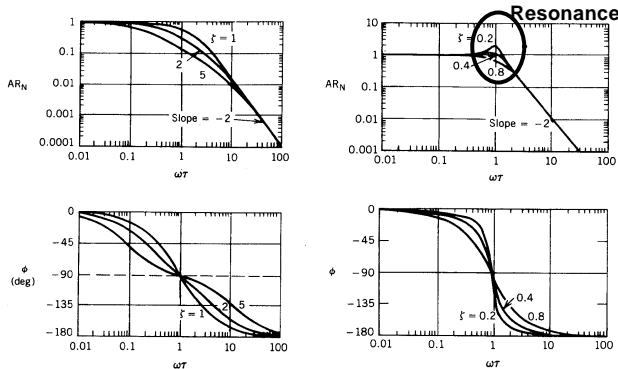

CHARACTERIZATION OF SECOND ORDER SYSTEM

2nd order Underdamped response

- Rise time (t_r)
 $t_r = t(n\pi - \cos^{-1}z) / \sqrt{1-z^2}$ ($n=1$)
- Time to 1st peak (t_p)
 $t_p = tp / \sqrt{1-z^2}$
- Settling time (t_s)
 $t_s \approx -t/z \ln(0.05)$
- Overshoot (OS)
 $OS = a/b = \exp(-pz / \sqrt{1-z^2})$
- Decay ratio (DR): a function of damping coefficient only!
 $DR = c/a = (OS)^2 = \exp(-2pz / \sqrt{1-z^2})$
- Period of oscillation (P) $P = 2pt / \sqrt{1-z^2}$

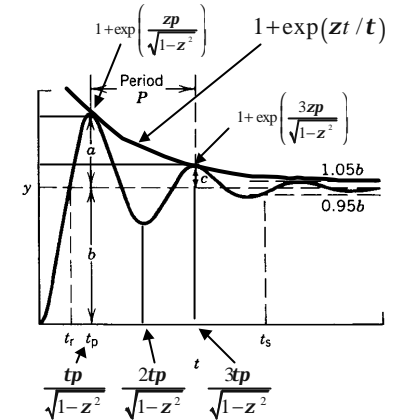

1ST ORDER VS. 2ND ORDER (OVERDAMPED)

Initial slope of step response

$$\text{1st order: } y'(0) = \lim_{s \rightarrow \infty} \{s^2 Y(s)\} = \lim_{s \rightarrow \infty} \frac{KAs}{t s + 1} = \frac{KA}{t} \neq 0$$

$$\text{2nd order: } y'(0) = \lim_{s \rightarrow \infty} \{s^2 Y(s)\} = \lim_{s \rightarrow \infty} \frac{KAs}{t^2 s + 2zt s + 1} = 0$$

Shape of the curve (Convexity)

$$\text{1st order: } y''(t) = -Ke^{-t/t} < 0 \text{ (For } K > 0) \Rightarrow \text{No inflection}$$

$$\text{2nd order: } y''(t) = -\frac{KA}{t_1 - t_2} \left(\frac{e^{-t/t_1}}{t_1} - \frac{e^{-t/t_2}}{t_2} \right)$$


(+ \rightarrow - as $t \uparrow$) \Rightarrow Inflection

2ND ORDER PROCESSES

Two tanks in series

- If $v_1 = v_2$, critically damped.
- Or, overdamped (no oscillation)

$$\frac{C_A(s)}{C_{Ai}(s)} = \frac{1}{((V_1/q)s + 1)((V_2/q)s + 1)}$$

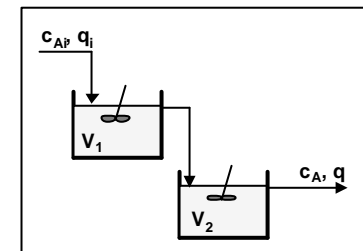

Spring-dashpot (shock absorber)


- By force balance

$$(mg + f(t)) - ky - cv = ma$$

$$m y'' = -ky - cy' + (mg + f(t))$$

$$\left(\sqrt{\frac{m}{k}} \right)^2 y'' + 2 \sqrt{\frac{c^2}{4mk}} \sqrt{\frac{m}{k}} y' + y = \tilde{f}(t)$$

Z (can be < 1 : underdamped)

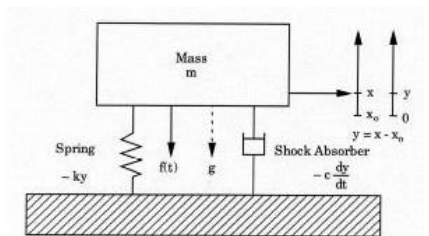



Underdamped Processes

- Many examples can be found in mechanical and electrical system.
- Among chemical processes, open-loop underdamped process is quite rare.
- However, when the processes are controlled, the responses are usually underdamped.
- Depending on the controller tuning, the shape of response will be decided.
- Slight overshoot results short rise time and often more desirable.
- Excessive overshoot may result long-lasting oscillation.

- Real pole from $(ts+1)$

$$s = -\frac{1}{t}$$

- Mode: $e^{-t/t}$




- If the pole is at the origin, it becomes “integrating pole.”
- If the pole is in RHP, the response increases exponentially.

- Complex pole from $(t^2s^2 + 2zts + 1)$ ($-1 < z < 1$)

$$s = -\frac{z}{t} \pm j \frac{\sqrt{1-z^2}}{t} = -a \pm jb$$

$$|s| = \sqrt{\frac{z^2 + 1 - z^2}{t^2}} = \frac{1}{t} \quad (\text{function of } t \text{ only})$$

$$\angle s = \pm \tan^{-1} \frac{\sqrt{1-z^2}}{z} \quad (\text{function of } z \text{ only})$$



POLES AND ZEROS

$$G(s) = \frac{N(s)}{D(s)} = \frac{K(b_m s^m + b_{m-1} s^{m-1} + \dots + b_1 s + 1)}{(a_n s^n + a_{n-1} s^{n-1} + \dots + a_1 s + 1)}$$

- Poles ($D(s)=0$)
 - Where a transfer function cannot be defined.
 - Roots of the denominator of the transfer function
 - Modes of the response
 - Decide the stability
- Zero ($N(s)=0$)
 - Where a transfer function becomes zero.
 - Roots of the numerator of the transfer function
 - Decide weightings for each mode of response
 - Decide the size of overshoot or inverse response
- They can be real or complex

- Modes: $e^{-at \pm jbt} = e^{-at} (\cos bt \pm j \sin bt)$

$$= e^{-z t/t} \left(\cos \frac{\sqrt{1-z^2}}{t} t \pm j \sin \frac{\sqrt{1-z^2}}{t} t \right)$$

- Assume t is positive.
- If $z < 0$, the exponential part will grow as t increases: unstable
- If $z > 0$, the exponential part will shrink as t increases: stable
- If $z = 0$, the roots are pure imaginary: sustained oscillation

- Effect of zero

$$G(s) = \frac{N(s)}{(s+p_1) \dots (s+p_n)} = w_1 \frac{1}{(s+p_1)} + \dots + w_n \frac{1}{(s+p_n)}$$

- The effects on weighting factors are not obvious, but it is clear that the numerator (zeros) will change the weighting factors.

EFFECTS OF ZEROS

- Lead-lag module**

$$G(s) = \frac{N(s)}{D(s)} = \frac{K(t_a s + 1)}{(t_1 s + 1)} \begin{matrix} \longrightarrow \text{Lead} \\ \longrightarrow \text{Lag} \end{matrix}$$

– Depending on the location of zero

$$Y(s) = \frac{KM(t_a s + 1)}{s(t_1 s + 1)} = KM \left\{ \frac{1}{s} + \frac{t_a - t_1}{t_1 s + 1} \right\} \quad y(t) = KM \left[1 - \left(1 - \frac{t_a}{t_1} \right) e^{-t/t_1} \right]$$

(a) $t_a > t_1 > 0$


The lead dominates the lag.

(b) $0 \leq t_a < t_1$

The lag dominates the lead.

(c) $0 > t_a$

Inverserresponse

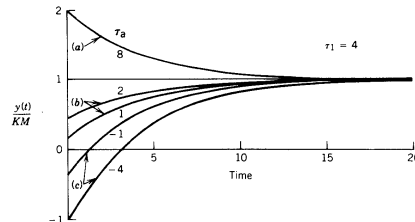


- Other interpretation**


$$G(s) = \frac{K(t_a s + 1)}{(t_1 s + 1)(t_2 s + 1)} = \frac{K_1}{(t_1 s + 1)} + \frac{K_2}{(t_2 s + 1)}$$

$$K_1 = \frac{K(t_a s + 1)}{(t_2 s + 1)} \Big|_{s=-1/t_1} = \frac{K(t_1 - t_a)}{(t_1 - t_2)}$$

$$K_2 = \frac{K(t_a s + 1)}{(t_1 s + 1)} \Big|_{s=-1/t_2} = \frac{K(t_a - t_2)}{(t_1 - t_2)}$$



– Since $t_1 > t_2$, 1 is slow dynamics and 2 is fast dynamics.

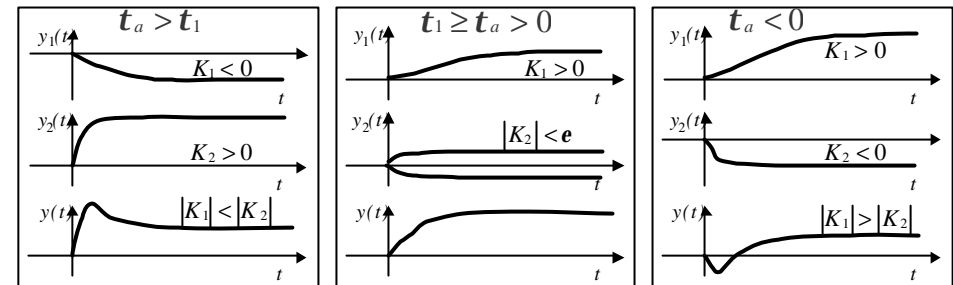

- Overdamped 2nd order+singlezero system**

$$G(s) = \frac{N(s)}{D(s)} = \frac{K(t_a s + 1)}{(t_1 s + 1)(t_2 s + 1)}$$

$$Y(s) = \frac{KM(t_a s + 1)}{s(t_1 s + 1)(t_2 s + 1)} = KM \left\{ \frac{1}{s} + \frac{t_1(t_a - t_1)}{t_1 - t_2} \frac{1}{t_1 s + 1} + \frac{t_2(t_a - t_2)}{t_2 - t_1} \frac{1}{t_2 s + 1} \right\}$$

$$y(t) = KM \left[1 + \frac{t_a - t_1}{t_1 - t_2} e^{-t/t_1} + \frac{t_a - t_2}{t_2 - t_1} e^{-t/t_2} \right]$$

(a) $t_a > t_1 > 0$ (assume $t_1 > t_2$)


The lead dominates the lags.

(b) $0 < t_a \leq t_1$


The lags dominate the lead.

(c) $0 > t_a$

Inverserresponse



EFFECTS OF POLE LOCATION

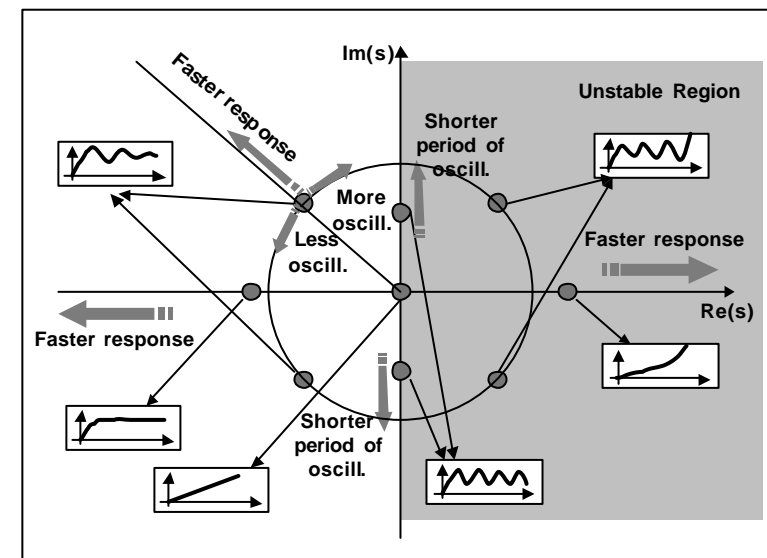

EFFECTS OF ZERO LOCATION

