


Partial Differential Equation from Chromatography Model

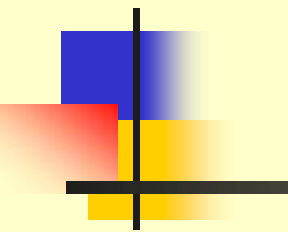

Contents

- Adsorption Equilibrium
- Adsorption Column Dynamics
 - ▶ Fixed-bed Adsorption
 - Mass Balance
 - Shock Wave

Adsorption Equilibrium

The adsorption of a chemical species can be represented by the equilibrium reaction



C : the dissolved chemical species

S : an adsorption site

CS : C bound to the site S

K_{eq} : Equilibrium constant

The equilibrium constant for this adsorption is

$$K_{eq} = \frac{[CS]}{[C][S]} \quad (2)$$

In many case, the concentration of adsorption sites is very much larger than the concentration of dissolved chemical species ($[S] \gg [C]$), and the equilibrium expression becomes

$$K_{eq} = \frac{[CS]}{[C]} \quad \text{or} \quad [CS] = K_{eq}[C] \quad (3)$$

This representation is particularly common in analytical liquid chromatography, where sample volumes are very small and solutes typically dilute.

This is known as *linear equilibrium*.

The linear isotherm approximation is less useful for preparative or industry scale adsorption and chromatography.

The most efficient operation uses all the adsorption sites available.

In this case, the concentration of the empty adsorption sites available cannot be ignored.

$$S_{tot} = [CS] + [S] \quad (4)$$

Combining eqs.(2) and (4), we can obtain equation(5).

$$[CS] = \frac{K_{eq} S_{tot} [C]}{1 + K_{eq} [C]} \quad (5)$$

This expression is the well-known *Langmuir isotherm*.


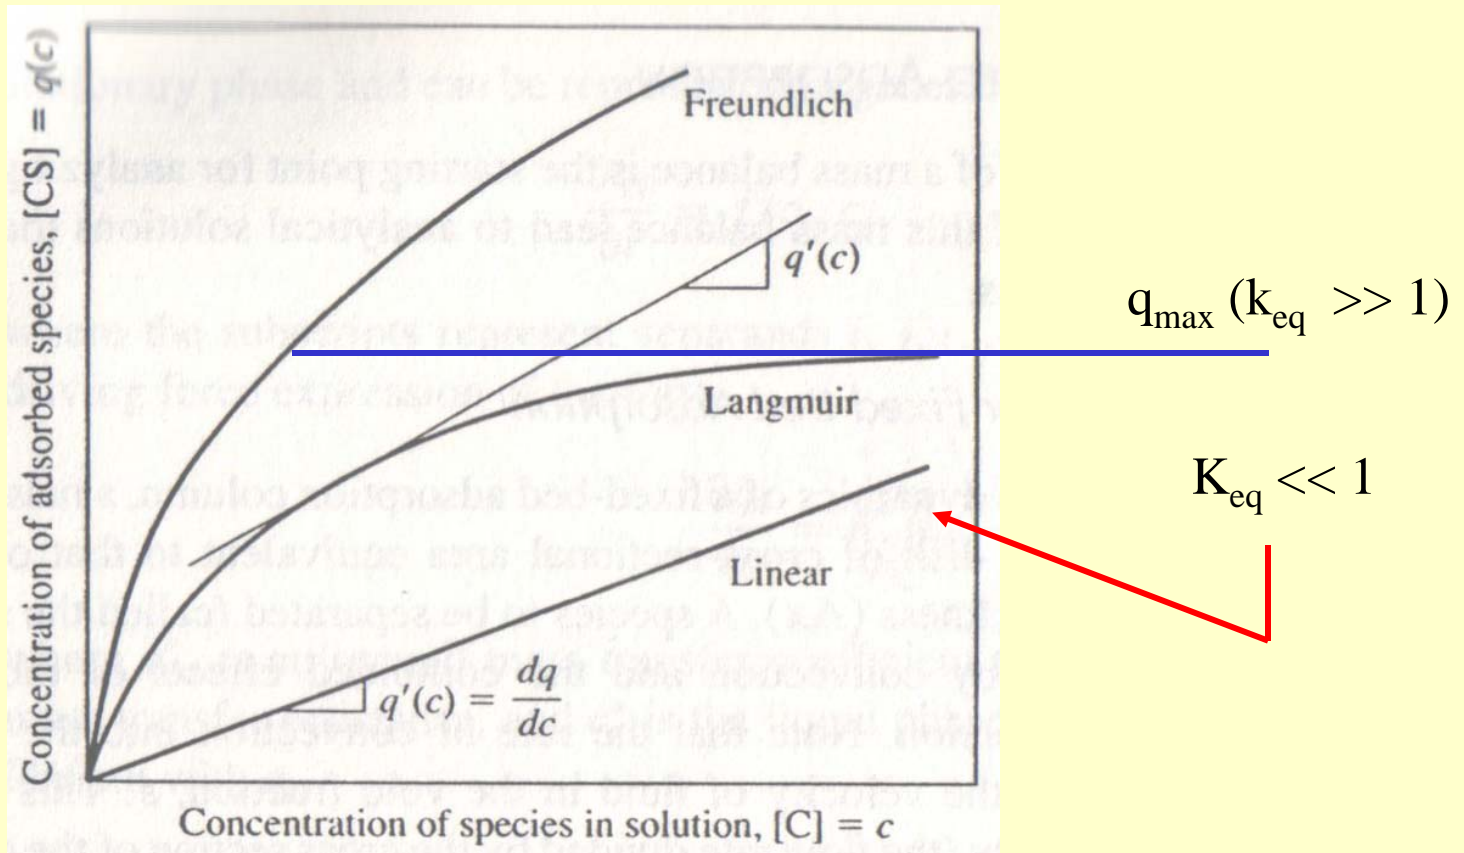


Figure 1. Shapes of different equilibrium adsorption isotherms.

Adsorption Column Dynamics

Fixed-Bed Adsorption


Mass Balance

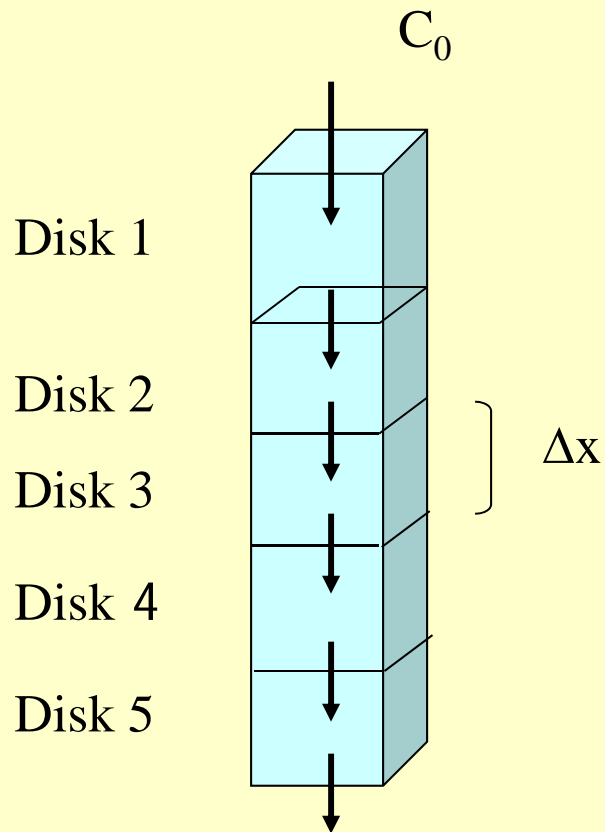

convection

diffusion

Flow direction

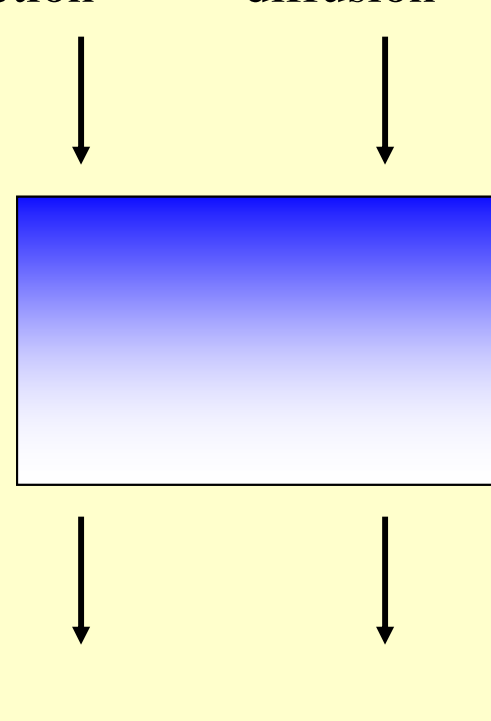

Disk n

(input rate to disk n) - (output rate from disk n)
 = (rate of accumulation in disk n)

$$\begin{aligned}
 & A \varepsilon \Delta t \left(\frac{v}{\varepsilon} c_i - D_{eff} \frac{\partial c_i}{\partial x} \right) \Bigg|_{x,t} - A \varepsilon \Delta t \left(\frac{v}{\varepsilon} c_i - D_{eff} \frac{\partial c_i}{\partial x} \right) \Bigg|_{x+\Delta x,t} \\
 & = A \varepsilon \Delta x \left(c_i \Big|_{t+\Delta t} - c_i \Big|_t \right) + A(1 - \varepsilon) \Delta x \left(q_i \Big|_{t+\Delta t} - q_i \Big|_t \right) \quad (6)
 \end{aligned}$$

c_i = concentration of a species in the mobile phase= $[C]_i$

q_i = concentration of a species in the stationary phase

averaged over an adsorption particle = $[CS]_i$

ε = void fraction

v = mobile phase superficial velocity (Q/A)

D_{eff} = effective dispersivity of a species to be separated in column

t = time

x = longitudinal distance in the column

Dividing by $A\varepsilon\Delta t\Delta x$, and $\Delta t \rightarrow 0$, $\Delta x \rightarrow 0$

This mass balance becomes a PDE

$$D_{eff} \frac{\partial^2 c_i}{\partial x^2} - \frac{v}{\varepsilon} \frac{\partial c_i}{\partial x} = \frac{\partial c_i}{\partial t} + \frac{1-\varepsilon}{\varepsilon} \frac{\partial q_i}{\partial t} \quad (7)$$

The term $\frac{\partial q_i}{\partial t}$ can be represented in general as

$$\frac{\partial q_i}{\partial t} = f(c_i, c_j, \dots, q_i, q_j, \dots) \quad (8)$$

This rate expression may be a linear driving force expression of the form

$$\frac{\partial q_i}{\partial t} = K_a (c_i - c_i^*) \quad (9)$$

K_a : the mass transfer coefficient

c_i^* : the liquid phase concentration at equilibrium with q_i

Assumption of Local Equilibrium and Negligible Dispersion

$$D_{eff} \frac{\partial^2 c_i}{\partial x^2} - \frac{v}{\varepsilon} \frac{\partial c_i}{\partial x} = \frac{\partial c_i}{\partial t} + \frac{1-\varepsilon}{\varepsilon} \frac{\partial q_i}{\partial t} \quad (10)$$

$$-\frac{v}{\varepsilon} \frac{\partial c_i}{\partial x} = \frac{\partial c_i}{\partial t} + \frac{1-\varepsilon}{\varepsilon} \frac{\partial q_i}{\partial c_i} \frac{\partial c_i}{\partial t} \quad (11)$$

$$-\frac{v}{\varepsilon} \frac{\partial c_i}{\partial x} = \frac{\partial c_i}{\partial t} + \frac{(1-\varepsilon)q_i'}{\varepsilon} \frac{\partial c}{\partial t} \quad (12)$$

$$-\frac{v}{\varepsilon} \frac{\partial c_i}{\partial x} = \left(1 + \frac{(1-\varepsilon)q_i'}{\varepsilon} \right) \frac{\partial c}{\partial t} \quad (13)$$

$$-v \frac{\partial c_i}{\partial x} = (\varepsilon + (1-\varepsilon)q_i') \frac{\partial c}{\partial t} \quad (14)$$

$$\frac{\partial c}{\partial t} + \frac{v}{\varepsilon + (1 - \varepsilon)q_i'} \frac{\partial c_i}{\partial x} = 0 \quad (15)$$


$$u_i = \frac{v}{\varepsilon + (1 - \varepsilon)q_i'} \quad : \text{shock wave velocity} \quad (16)$$

$$\frac{\partial c}{\partial t} + u_i \frac{\partial c_i}{\partial x} = 0 \quad (17)$$

u_i is a velocity of moving solute i .

The expression for u_i given by equation() is the *effective velocity* of component i through the packed bed.

Ex) shock wave

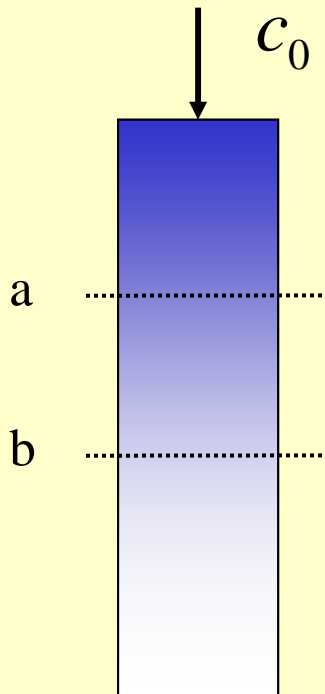

$$c_a > c_b$$

$$q'_a < q'_b$$

$$u_a > u_b$$

→ Back concentration profile can't overtake forward concentration profile physically.